

客户 Customer: _____

日期 DATE: _____

纳入仕様书 SPECIFICATION

产 品 名 称 PRODUCT NAME: 声表滤波器

SAW Filter

贵 司 料 号 YOUR PART NO.: _____

敝 司 料 号 OUR PART NO.: MS14U1G57-G3S

版 本 号 VERSION.: V1.0

接受 RECEPTION

THE SPECIFICATION HAS BEEN ACCEPTED.

该纳入仕様书已被我司接受

日期:
DATE:

公司:
COMPANY:

批准
CFMD

审核
CHKD

接收
RCVD

深圳市麦捷微电子科技股份有限公司
SHENZHEN MICROGATE TECHNOLOGY CO., LTD
TEL: 86-755-28085000
FAX: 86-755-28085605

CFMD. 批准	CHKD. 审核	DSGD. 担当
梁启新	赖定权	吴继航

深圳市麦捷微电子科技股份有限公司
地址: 深圳市龙华新区观澜街道高尔夫大道裕新路
电话(Tel): 0755-28085000 传真(Fax): 0755-28085605

邮编(Postcode): 518110

纳入仕様书改定履历

MODIFY HISTORY OF SPECIFICATION

NO.	修改日期/DATE	修改内容/CONTENT	批准/APPROVED
1.0	2017.03.16	初稿 /New Released	梁启新

目录 CATALOG

1 适用范围 Scope.....	4
2 品名构成 Product Identification.....	4
3 尺寸和管脚定义 Dimensions and PIN Configurations.....	4
4 推荐焊盘与测试电路 Recommended Land Pattern and Test Circuit.....	4
5 电气性能 Electrical Characteristics.....	5
6 包装 Packaging.....	8
7 装箱清单及标志 Packing documents and marking.....	9
8 保管 Storage.....	11

1 适用范围 Scope

麦捷声表滤波器系列产品设计用于 WIFI、GPS、移动电话和无绳电话机等相关市场中。

Microgate SAW Component is applicable for WIFI/GPS/Mobile phone/Cordless phone relevant market.


2 品名构成 Product Identification

MS 14 U 1G57 - G 3 S
① ② ③ ④ ⑤ ⑥ ⑦

- ① 麦捷声表滤波器/Microgate SAW
- ② 尺寸/Size: 14 (20-2016, 18-1814, 15-1511, 14-1411, 11-1109)
- ③ 输出/Output: U (B-Balance out, U-Unbalance out)
- ④ 频率/Frequency: 1G57 (1G57-1.57GHz)
- ⑤ 型号/Type: G (GPS: Global Position System, 全球定位系统)
- ⑥ 频段/Band: 1 (1: GPS 频段; 2: GPS +GLONASS 频段; 3: GPS +GLONASS+北斗 2 频段)
- ⑦ 流水号/Serial number

3 尺寸和管脚定义 Dimensions and PIN Configurations

Unit: mm

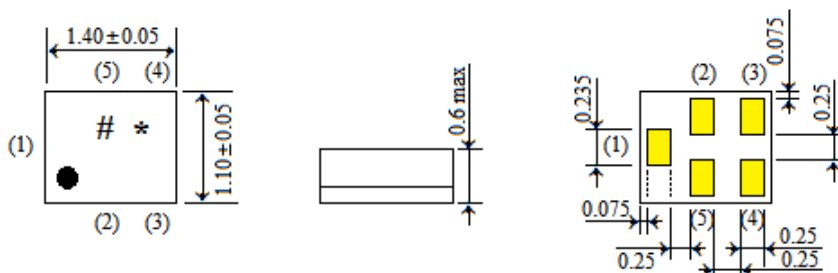


PIN NO.	(1)	(2)	(3)	(4)	(5)
PIN Name	Input	GND	GND	Output	GND

4 推荐焊盘与测试电路 Recommended Land Pattern and Test Circuit


Land Pattern

Unit:mm



Test Circuit

Bottom View

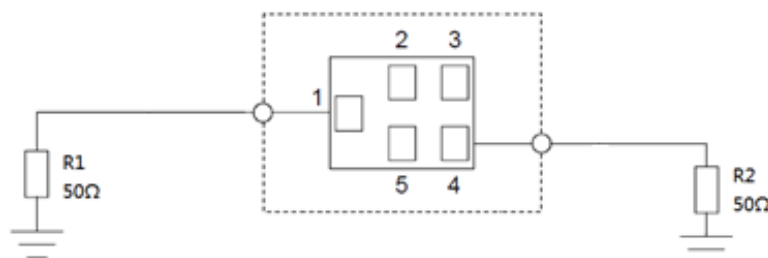

深圳市麦捷微电子科技股份有限公司

地址: 深圳市龙华新区观澜街道高尔夫大道裕新路

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

5 电气性能 Electrical Characteristics

操作温度范围 Operating Temperature Range : -20 to +85℃

保存温度范围 Storage Temperature Range : -40 to +85℃



测试温度范围 Test Temperature: 25℃±2℃

Table1. Electrical Specification

No.	Item	Frequency (MHz)	Specification			
			Min	Max	Typ.	Unit
1	Insertion Loss	1574.42 ~ 1576.42		1.5	1.1	dB
2		1559.05~1563.15		3.0	1.8	dB
3		1573.37~1577.47		1.5	1.0	dB
4		1597.78~1605.66		3.0	2.1	dB
5	Group Delay Ripple	1597.78~1605.66		15	8	nSp-p
6	Absolute Attenuation	DC ~ 824	35		39	dB
7		824 ~ 925	35		39	dB
8		1427~1453	35		42	dB
9		1710~1785	35		43	dB
10		1850~1910	35		43	dB
11		1920~1980	35		43	dB
12		2400~2500	40		48	dB
13		2500~2570	40		51	dB
14		2600~3000	40		49	dB
15		4900~5850	30		37	dB
16	VSWR	1574.42 ~ 1576.42		2.0	1.2	
17		1559.05~1563.15		2.0	1.5	
18		1573.37~1577.47		2.0	1.2	
19		1597.78~1605.66		2.0	1.5	
20	Input Signal Level	Max: 13dBm,				

Frequency Performance

Frequency Response

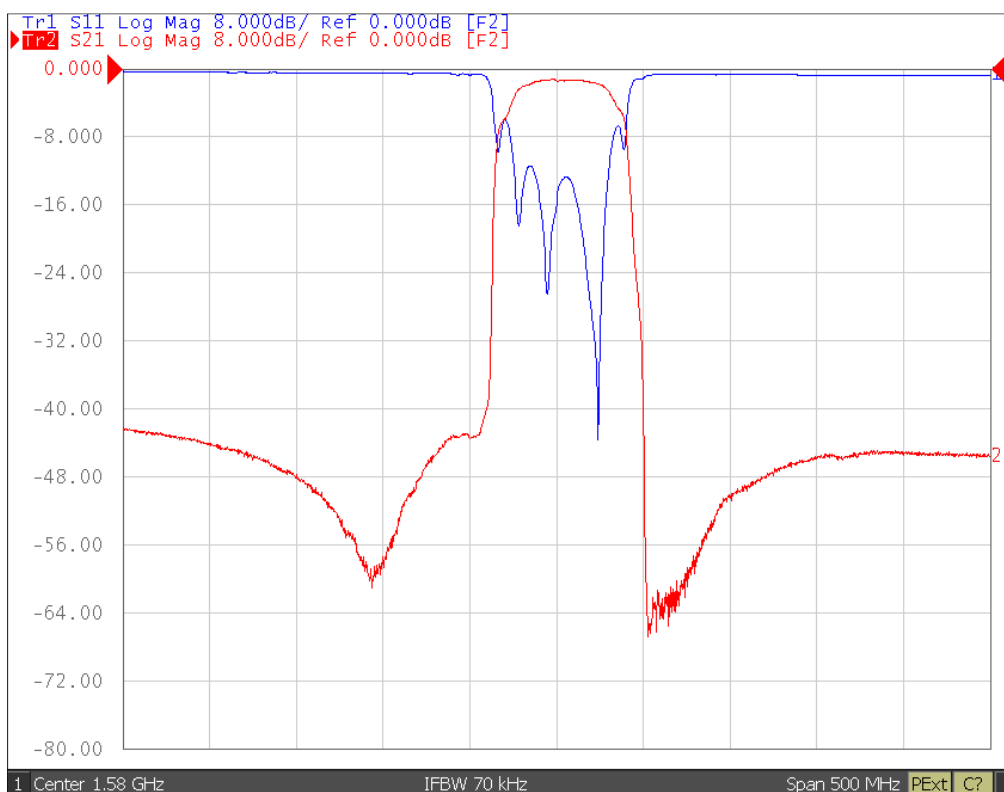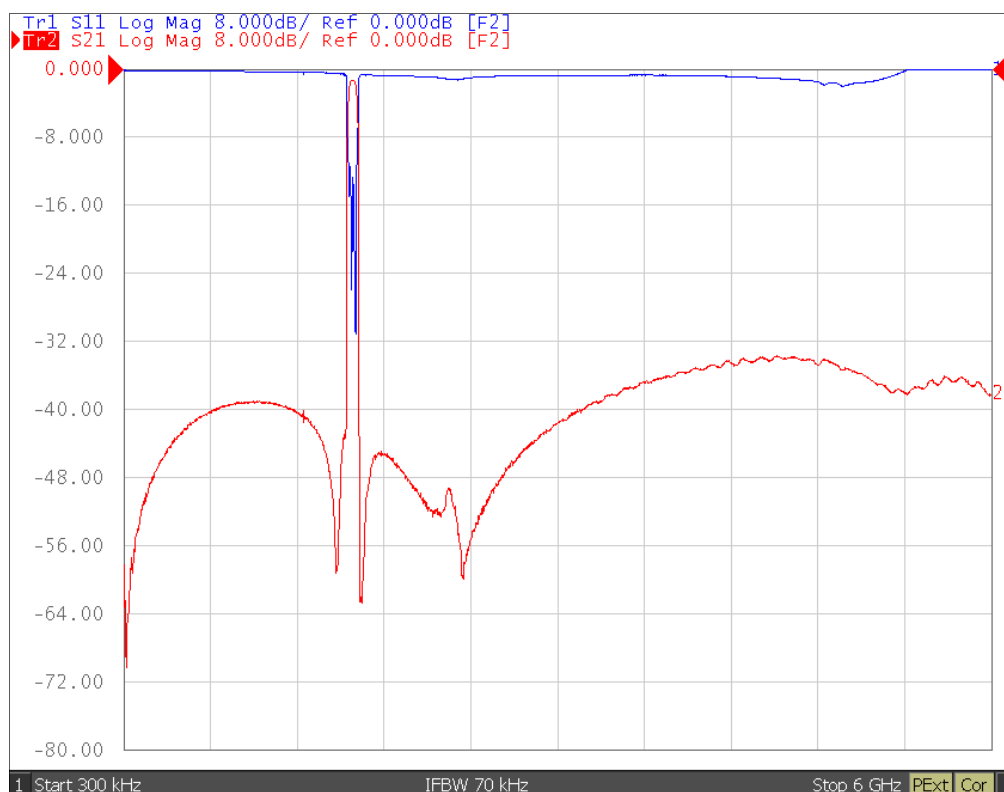

深圳市麦捷微电子科技股份有限公司


地址：深圳市龙华新区观澜街道高尔夫大道裕新路

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

VSWR

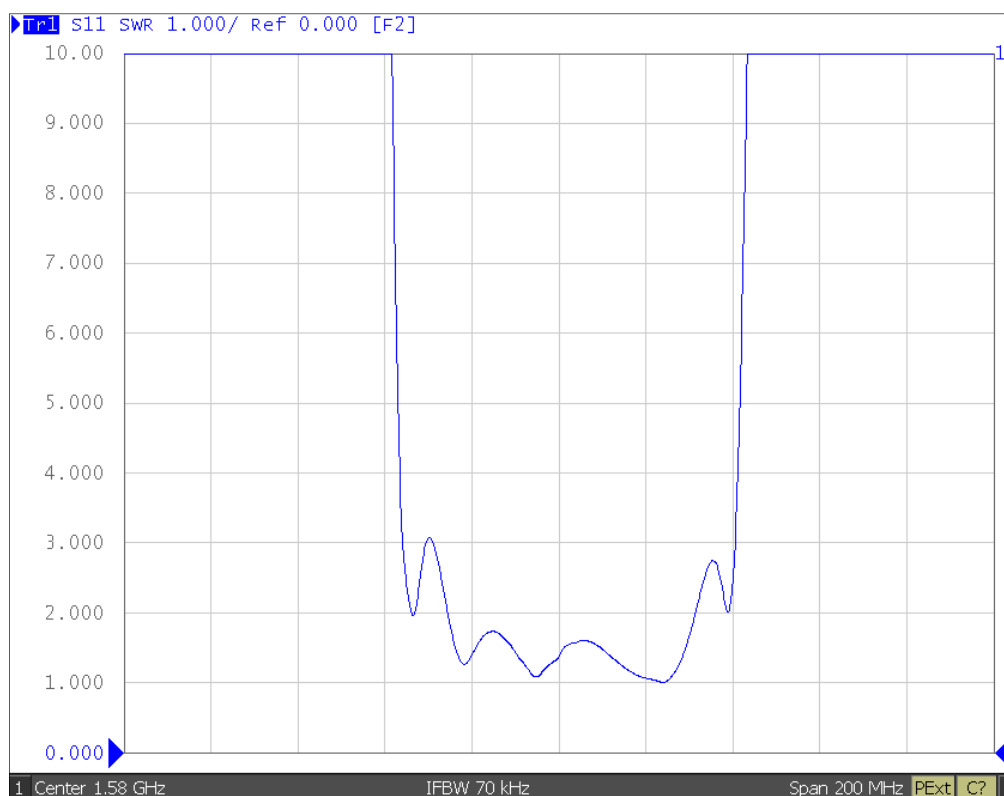

深圳市麦捷微电子科技股份有限公司

地址：深圳市龙华新区观澜街道高尔夫大道裕新路


电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110


6 包装 Packaging

①编带尺寸 Dimensions of Tape:

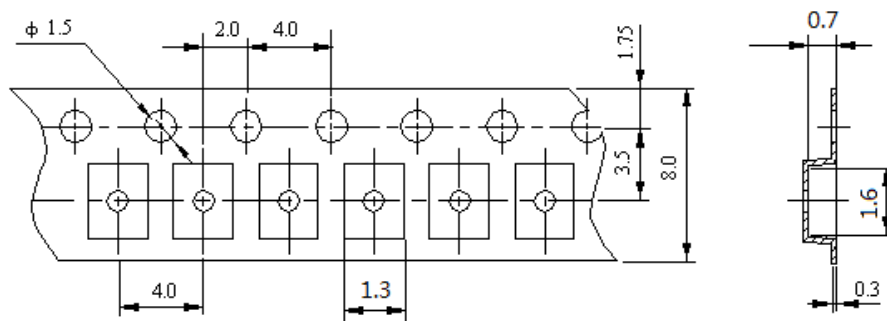

②带轮尺寸 Dimensions of Reel

Unit: mm

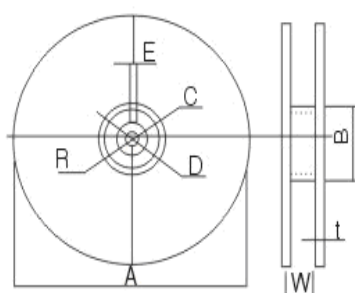


Reel material: PS (Polystyrene)

A	178±2
B	60±2
C	13.0±0.5
D	21.0±0.8
E	2.0±0.5
W	8.5±1.0
t	1.2±0.2
R	1.0±0.25

③编带抗拉强度 Pulling strength of tapes:

载带 Carrier tape	10N or more (1kgf or more)
上盖带 Cover tape	5N or more (1kgf or more)

④编带简图及拉伸方向 Taping figure and drawing direction:

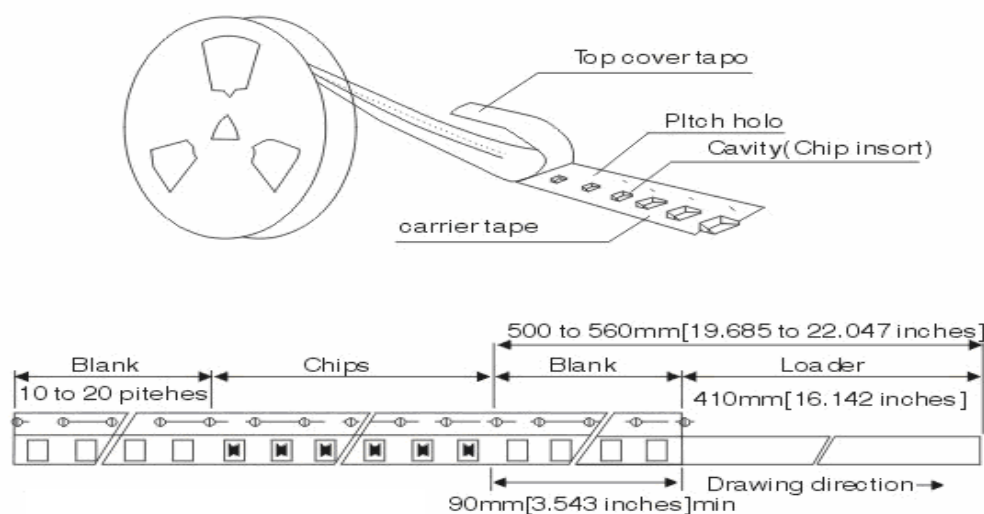

深圳市麦捷微电子科技股份有限公司

地址: 深圳市龙华新区观澜街道高尔夫大道裕新路


电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

⑤盖带的剥离强度 Peeling strength of cover tape:

盖带 Cover tape	0.3~0.7N (30gf~70gf)
---------------	----------------------

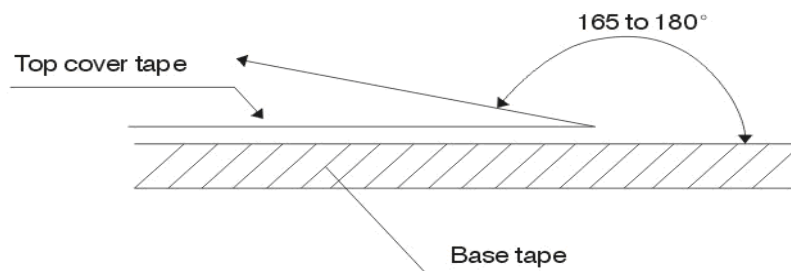

测试条件 Test condition:

- 1) 剥离角度 peel angle: 165°~180° vs. carrier tape.
- 2) 剥离速度 peel speed: 300mm/min±10%.

⑥包装数量 Packaging quantities: 3000 PCS / Reel


7 装箱清单及标志 Packing documents and marking

①包装文件 Packing documents

- a. 装箱清单 Packing list.
- b. 合格证书 Certificate of compliance.

②盘上标记 Marking on reels:

- a. 麦捷料号 MICROGATE Part No.
- b. 生产批号 Lot number
- c. 盘装数量 Quantity per reel
- d. 检验员号 Inspector No.

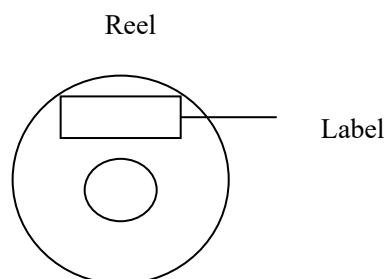

以上内容必须在标签上注明.All above shall be shown on marking label

麦捷公司标签如下所示: MICROGATE marking label will be as following:

MICROGATE		
CUSTOMER:	P. O. NO	
CUSTOMER PART NO:	DATE CODE	LOT NO
MG PART NO:	QUANTITY	INSP. NO

||||| ||||| ||||| |||||
MG PART NO

深圳市麦捷微电子科技股份有限公司


地址: 深圳市龙华新区观澜街道高尔夫大道裕新路

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518110

检验合格后, 检验员在标签上盖上合格章。合格章如下所示: The eligible reels will be pressed a mark onto the surface. The mark will be as following:

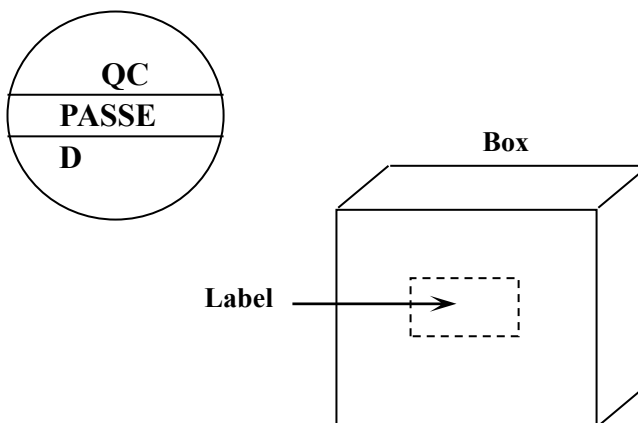


③内包装盒标记: Marking on inner box

- a. 型号 MICROGATE part No.
- b. 每盒数量 Quantity per box
- c. 包装日期 Date

以上内容必须在标签上注明 (标签见 7.2 所示)。Above shall be shown on marking label (The marking label is shown in item 7.2).

④外包装箱标记 Marking on outer case:

- 1) 制造商 Manufacturer: "MICROGATE" ①
- "中国深圳制造" "Made in Shenzhen CHINA" ②
- 2) 发运标记 Ship marking:
"向上" "UP", "小心轻放" "HAND CARE", "防潮" "MOISTURE-PROOF".
- 3) 包装标签包括以下内容 Packing label include the following:
 - a. 型号 MICROGATE Part No
 - b. 总数量 Total quantity per case
 - c. 包装日期 Date;

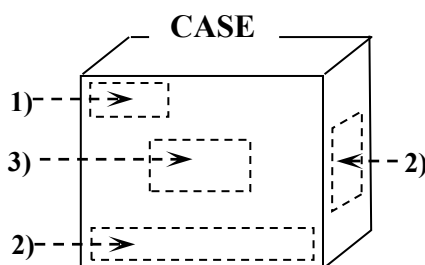

以上内容必须在标签上注明。(参见 7.2 所示)

All above shall be shown on marking label. (The marking label is shown in item 7.2)

8 保管 Storage

①保管期限 Storage period

距麦捷出厂检验时间六个月内，产品可以使用；检验时间可以通过包装外侧标记的检验号确认；若时间超出六个月，应检查焊接性能后方可使用。Products which inspected in MICROGATE over 6 months ago should be examined and used, which can be confirmed with inspection No. marked on the container. Solder ability should be checked if this period is exceeded.

② 保存条件 Storage conditions

- 存放货物的库房应满足以下条件 Products should be storage in the warehouse on the following conditions

温度 Temperature: $\leq 40^{\circ}\text{C}$

湿度 Humidity : $\leq 70\%$ relative humidity

不允许温、湿度有极剧变化。No rapid change on temperature and humidity

- 禁止将产品保管在腐蚀性物质中，例如硫磺、氯气或者酸，否则将引起端头氧化，导致降低焊接性。

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solder ability.

- 为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

- 产品保管在库房中时，应避免热冲击，振动以及直接光照等等。Products should be storage in the warehouse without heat shock, vibration, and direct sunlight and so on.

- 产品应密封包装 Products should be storage under the airtight packaged condition.