

客户 CUSTOMER: _____

日期 DATE: _____

纳入仕様书

SPECIFICATION

产 品 名 称 PRODUCT NAME: 微波带通滤波器

Microwave Band-Pass Filter

贵 司 料 号 YOUR PART NO.: _____

敝 司 料 号 OUR PART NO.: MBPF18M2450-N86

版本号 VERSION: V 2.0

接受 RECEPTION

THE SPECIFICATION HAS BEEN ACCEPTED.

该纳入仕様书已被我司接受

日期:
DATE:公司:
COMPANY:批准
CFMD审核
CHKD接收
RCVD

本纳入仕様书共 12 页

MANUFACTURING NAME

深圳市麦捷微电子科技股份有限公司

SHENZHEN MICROGATE TECHNOLOGY CO., LTD

TEL: 86-755-28085000

FAX: 86-755-28085605

CFMD. 批准	CHKD. 审核	DSGD. 担当
梁启新	赖定权	曾艳峰

深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118

1

纳入仕様书改定履历 MODIFY HISTORY OF SPECIFICATION

NO.	DATE	CONTENT	APPROVED
1.0	2011.03.07	初稿 Constitute	梁启新
2.0	2014.05.16	Modify Electrical Characteristics 更新电性参数	梁启新

目录 CATALOG


1 适用范围 Scope.....	4
2 品名构成 Product Identification.....	4
3 形状、尺寸和材料 Appearance, Dimensions and Material.....	4
4 测试条件 Testing Conditions.....	5
5 电气性能 Electrical Characteristics.....	5
6 特性曲线 Characteristic curve.....	5
7 信赖性试验 Reliable Performance.....	6
8 焊接条件 Recommended Soldering Conditions.....	8
9 包装 Packaging.....	9
10 装箱清单及标志 Packing documents and marking.....	10
11 保管 Storage.....	12

1 适用范围 Scope

“麦捷”微波带通滤波器系列产品设计用于 WIFI、GSM、Bluetooth、PDA 和无绳电话机中，具有低的插入损耗、高的衰减和小体积 SMD 片式设计，能减少复杂的调校工作，可以简化电路设计。




“Microgate” Microwave Band-Pass filter series are designed to be used in WLAN、GSM、Bluetooth、PDA & cordless phones with low insertion loss and high attenuation as well as small size SMD chip design, which can simplify your complex tuning and circuit design.

2 品名构成 Product Identification

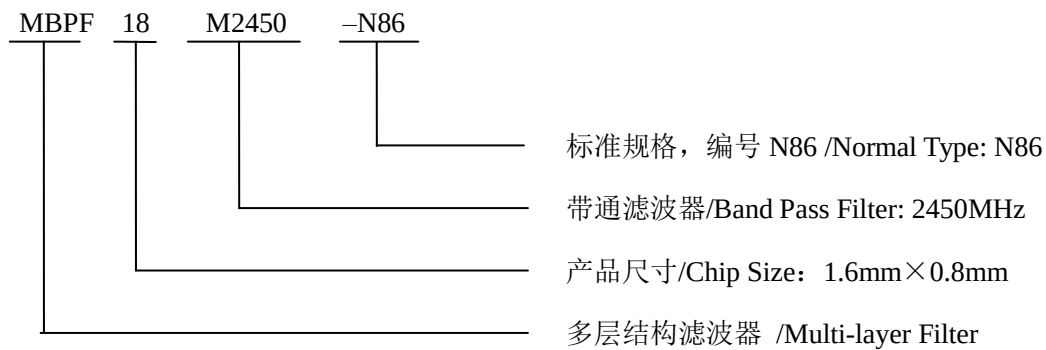

3 形状、尺寸和材料 Appearance, Dimensions and Material

Unit: mm

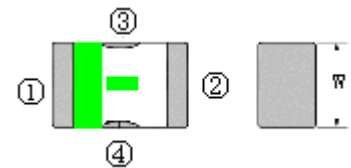


Termination Configuration

①②: I/O

③④: GND

Type 型号	L	W	T	a ₁ , a ₃	a ₁ -a ₃	a ₂
1608	1.6±0.15	0.8±0.10	0.60±0.10	0.2±0.05	≤0.05	0.55±0.05

Part Name 名称	Structure and Material 结构及材料
Resonator 谐振体	Dielectric Material LTCC 介质材料
In/Output Terminals 输入/输出	Ag 银
Ground Base 接地面	Ag 银

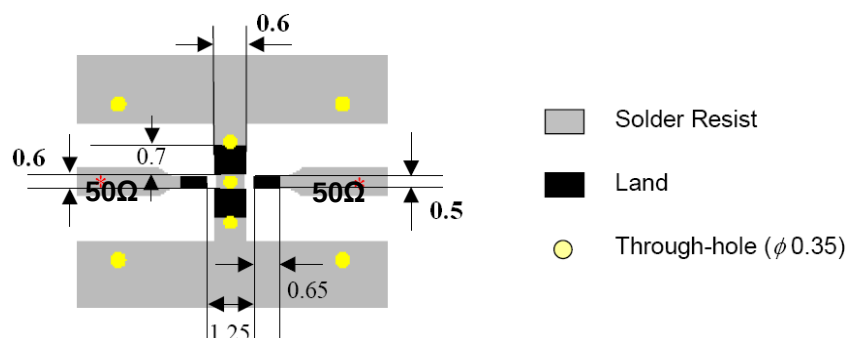

深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118

4 测试条件 Testing Conditions

除非另有规定，否则在以下条件下测试 <Unless otherwise specified>

温度 Temperature : Ordinary Temperature (5 to 35℃)
湿度 Humidity : Ordinary Humidity (25 to 85% RH)

大气压强 Atmospheric Pressure : 86 to 106 kPa

当对测量结果有疑问时<In case of doubt>

温度 Temperature : 20±2℃
湿度 Humidity : 60 to 75% RH
大气压强 Atmospheric Pressure : 86 to 106 kPa


5 电气性能 Electrical Characteristics

操作温度范围 Operating Temperature Range : -40 to +85℃

保存温度范围 Storage Temperature Range : -40 to +85℃

No.	Item (项目)	Specifications (特性)
5.1	Center Frequency 中心频率 fo	2450 MHz
5.2	Insertion Loss 插入损耗	≤1.8dB (at 25℃±5℃)
		≤2.1dB (at -40℃~85℃)
5.3	Band Width 通带宽度	fo±50.0 MHz
5.4	V.S.W.R (in BW) 驻波比	≤2.0
5.5	Attenuation 阻带衰减	≥35dB (824~960MHz) ≥35dB (1710~1990MHz) ≥25B (4800~5000MHz)
5.6	Permissible Input Power 输入功率 (Max)	2.0 W
5.7	In/Output Impedance 输入/输出阻抗	50 Ω

6 特性曲线 Characteristic curve

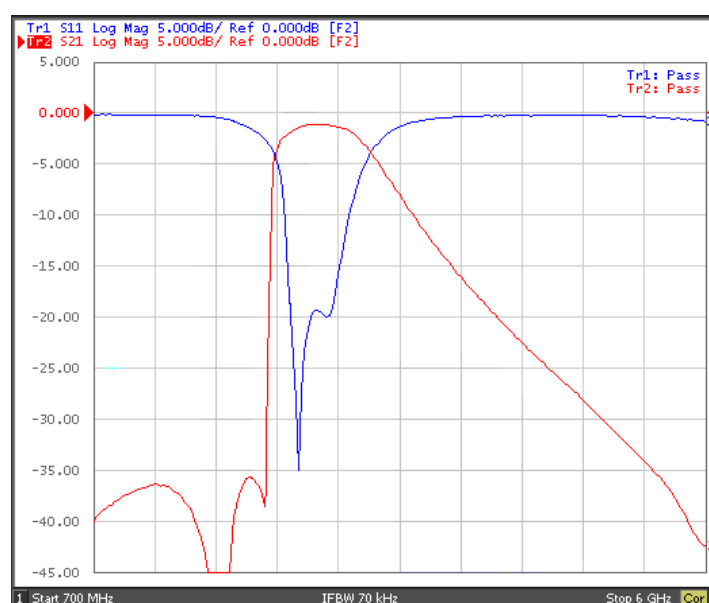

深圳市麦捷微电子科技股份有限公司


地址：深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118

7 信赖性试验 Reliable Performance

NO.	Item	Specifications	Test Methods	
7-1	Solder-Ability 可焊性	More than 90% of termination should be covered with new solder. 端电极焊锡覆盖率为90%以上。	焊锡 Solder: Sn: Pb=	100:0
			焊锡温度 Temperature:	255℃+5℃/-0℃
			助焊剂 Flux: 松香 rosin	
			浸渍时间 Duration:	5±0.5s
7-2	Leaching Resistance 耐焊性	More than 75% of termination Should be covered with new solder. 端电极焊锡覆盖率为75%以上	焊锡 Solder: Sn: Pb=	100:0
			焊锡温度 Temperature:	270℃+2℃/-0℃
			助焊剂 Flux: 松香 rosin	
			浸渍时间 Duration:	10±0.5s
7-3	Terminal Strength 端头强度	The terminal and body should be no damage 端头和瓷体不应见损伤	The device should not be broken after tensile force of 1.0kg is slowly applied to pull a lead pin of the fixed device in the lead axis direction for 10±1 seconds. 在产品电极端子上或表面上应能承受 1kg 垂直拉力 10±1 秒	
7-4	Bending Strength 弯曲试验	No mechanical damage should be noticed 不应见机械损伤	Weld the product to the center part of the PCB with the thickness 1.6±0.2mm as the illustration shows, and keep exerting force arrow-ward on it at speed of: 1mm/S, and hold for 5±1S at the position of 1.5mm bending distance, so far, any peeling off of the product metal coating should not be detected. 将产品按图焊在 1.6±0.2mm 的 PCB 板中间, 由箭头方向施力 1mm/S, 弯曲距离 1.5mm, 保持 5±1S, 产品金属层无脱落。 	
7-5	Drop 跌落	Post Environmental Tolerance (环境试验后允许附加误差)	Drop 10 times on a concrete floor from a height of 1m. 从距混凝土地面 1m 高度自由落下, 重复 3 次。	

7-6	Vibration 振动	1 Center Frequency 中心频率 f_0 : ± 2.0 MHz; 2 Insertion Loss 插入损耗: ± 0.5 dB;	频率 Frequency: 10 to 55Hz 振幅 Amplitude: 1.5mm 方向及时间 Direction and time: X, Y and Z directions for 2 hours each.
7-7	Humidity resistance 耐潮湿	3 Band Width 通带宽度: ± 1.0 MHz 4 Ripple (in BW) 通带波动: ± 0.5 dB; 5 V.S.W.R (in BW) 驻波比: ± 0.2 6 Attenuation 阻带衰减: ± 2.0 dB	a. 试验条件 Test condition 温度 Temp.: $60 \pm 2^\circ\text{C}$ 湿度 Humidity: 90%~95% 试验时间 Test time: 96 ± 2 h b. 测量条件 Measurement method: 试验后常温常湿环境中放置 (24 ± 2) 小时后测量。 The component should be stabilized at normal condition for (24 ± 2) hours before test.
7-8	High temperature resistance 耐高温		a. 试验条件 Test condition 温度 Temp.: $+85 \pm 2^\circ\text{C}$ 试验时间 Test time: 96 ± 2 h b. 测量条件 Measurement method: 试验后常温常湿环境中放置 (24 ± 2) 小时后测量。 The component should be stabilized at normal condition for (24 ± 2) hours before test.
7-9	Low temperature resistance 耐低温		a. 试验条件 Test condition 温度 Temp.: $-40 \pm 2^\circ\text{C}$ 试验时间 Test time: 96 ± 2 h b. 测量条件 Measurement method: 试验后常温常湿环境中放置 (24 ± 2) 小时后测量。 The component should be stabilized at normal condition for (24 ± 2) hours before test.
7-10	Thermal shock (Temperature cycle) 热冲击 (温度循环)		a. 试验条件 Test condition 1) 温度 Temp.: -40°C , 时间 time: 30 ± 3 min 2) 温度 Temp.: $+85^\circ\text{C}$, 时间 time: 30 ± 3 min 5 cycles b. 测量条件 Measurement method: 试验后常温常湿环境中放置 (24 ± 2) 小时后测量。 The component should be stabilized at normal condition for (24 ± 2) hours before test.

8 焊接条件 Recommended Soldering Conditions

1、焊剂 Flux, Solder

① 使用松香助焊剂，禁止使用卤化物含量超过 0.2wt% 的强酸性助焊剂。

Use rosin-based flux. Don't use highly acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).


② 使用纯锡焊料 Use Sn solder.

2、回流焊条件 Reflow soldering conditions

● 预热时，产品表温与焊料温度的温差最大不允许超出 150℃，焊接完后冷却时，产品表温与溶剂温度之间的温差最大不允许超出 100℃。预热不足有可能引发产品表面裂纹，导致产品品质下降。

Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150℃ max. Cooling into solvent after soldering also should be in such a way that temperature difference is limited to 100℃ max. Unwrought pre-heating may cause cracks on the product, resulting in the deterioration of products quality.

● 标准回流焊曲线 Standard soldering profile.

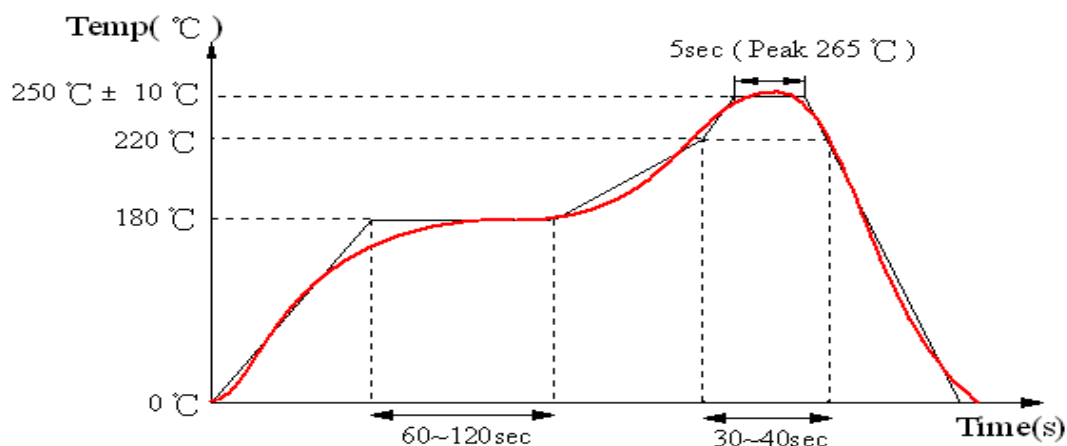

3、手工返工 Reworking with soldering iron

当使用电烙铁进行手工焊接时，以下条件必须严格遵守 The following conditions must be strictly followed when using a soldering iron.

预热 Pre-heating	150℃, 1 minute
尖端温度 Tip temperature	350℃ max
输出功率 Soldering iron output	80w max
电烙铁头尖端尺寸 End of soldering iron	φ3mm max
焊接时间 Soldering time	3 seconds max

深圳市麦捷微电子科技股份有限公司

地址：深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号


电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118

9 包装 Packaging


① 编带尺寸 Dimensions of Tape:

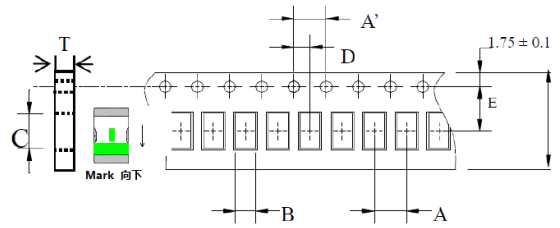

Type	A	A'	B	C	D	E	F	T	Tape Material
1608	4.0 ± 0.1	4.0 ± 0.1	1.1 ± 0.1	1.9 ± 0.1	2.0 ± 0.1	3.5 ± 0.1	8.0 ± 0.1	0.75 ± 0.05	Paper

② 带轮尺寸 Dimensions of Reel

Unit: mm

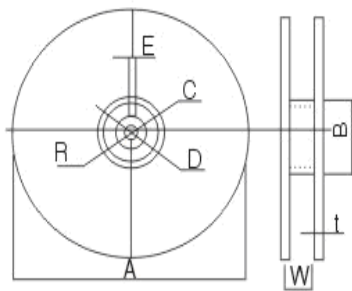



Reel material: PS (Polystyrene)

A	178 ± 2
B	60 ± 2
C	13.0 ± 0.5
D	21.0 ± 0.8
E	2.0 ± 0.5
W	8.5 ± 1.0
t	1.2 ± 0.2
R	1.0 ± 0.25

③ 编带抗拉强度 Pulling strength of tapes:

载带 Carrier tape	10N or more (1kgf or more)
上盖带 Cover tape	5N or more (1kgf or more)

④ 编带简图及拉伸方向 Taping figure and drawing direction:

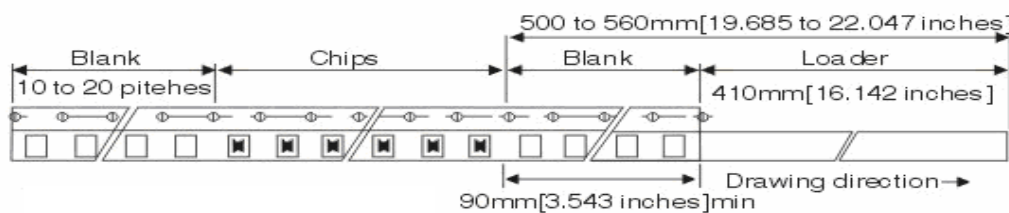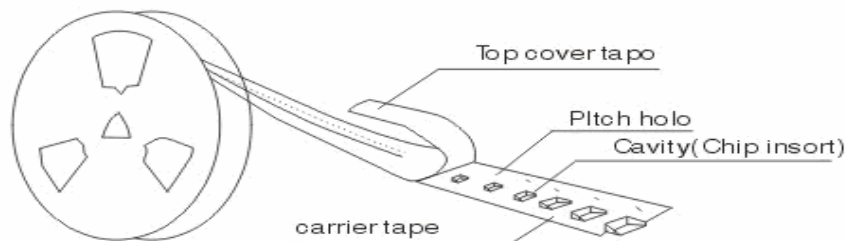

深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号


电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118

⑤ 盖带的剥离强度 Peeling strength of cover tape:

盖带 Cover tape	0.3~0.7N (30gf~70gf)
---------------	----------------------

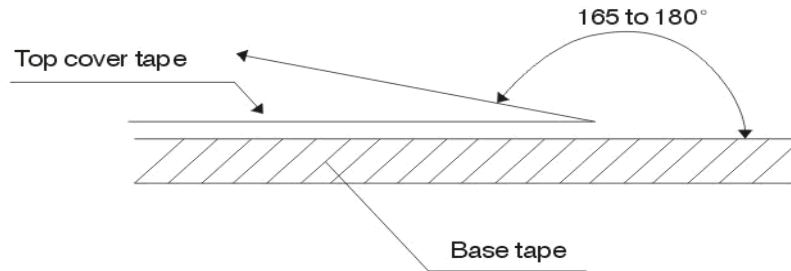

测试条件 Test condition:

- 1) 剥离角度 peel angle: 165 ~180 °vs. carrier tape.
- 2) 剥离速度 peel speed: 300mm/min $\pm$ 10%.

⑥ 包装数量 Packaging quantities: 4000 PCS / Reel

10 装箱清单及标志 Packing documents and marking


1. 包装文件 Packing documents

Packing includes the following:

- a. 装箱清单 Packing list.
- b. 合格证书 Certificate of compliance.

2. 盘上标记 Marking on reels:

- a 麦捷料号 MICROGATE Part No.
- b 生产批号 Lot number
- c 盘装数量 Quantity per reel
- d 检验员号 Inspector No.

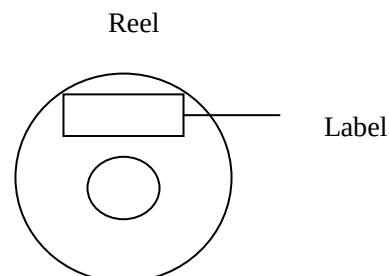


以上内容必须在标签上注明.All above shall be shown on marking label

麦捷公司标签如下所示: MICROGATE marking label will be as following:

MICROGATE		
CUSTOMER:	P. O. NO	
CUSTOMER PART NO:	DATE CODE	LOT NO
MG PART NO:	QUANTITY	INSP. NO



MG PART NO



深圳市麦捷微电子科技股份有限公司

地址: 深圳市坪山新区坪山大道 6075 号龙田科技园二巷 6 号

电话(Tel): 0755-28085000

传真(Fax): 0755-28085605

邮编(Postcode): 518118


检验合格后,检验员在标签上盖上合格章。合格章如下所示: The eligible reels will be pressed a mark onto the surface. The mark will be as following:

3. 内包装盒标记: Marking on inner box

- a. 型号 MICROGATE part No.
- b. 每盒数量 Quantity per box
- c. 包装日期 Date

以上内容必须在标签上注明 (标签见 10.2 所示)。

Above shall be shown on marking label (The marking label is shown in item 10.2).

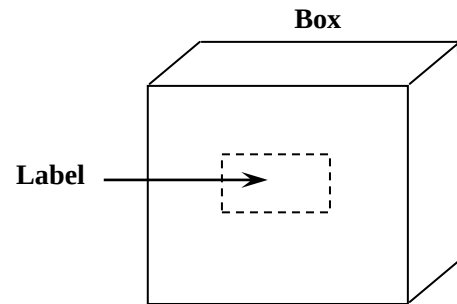

4. 外包装箱标记 Marking on outer case:

1) 制造商 Manufacturer: "MICROGATE" ①

"中国深圳制造" "Made in Shenzhen CHINA" ②

2) 发运标记 Ship marking:

"向上" "UP", "小心轻放" "HAND CARE", "防潮" "MOISTURE-PROOF".


3) 包装标签包括以下内容 Packing label include the following:

- a. 型号 MICROGATE Part No
- b. 总数量 Total quantity per case
- c. 包装日期 Date;

以上内容必须在标签上注明。(参见 10.2 所示)

All above shall be shown on marking label.

(The marking label is shown in item 10.2)

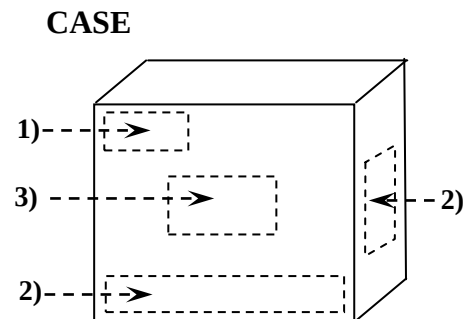

11 保管 Storage

①. 保管期限 Storage period

距麦捷出厂检验时间六个月内，产品可以使用；检验时间可以通过包装外侧标记的检验号确认；若时间超出六个月，应检查焊接性能后方可使用。Products which inspected in MICROGATE over 6 months ago should be examined and used, which can be confirmed with inspection No. marked on the container. Solder ability should be checked if this period is exceeded.

②. 保存条件 Storage conditions

●存放货物的库房应满足以下条件 Products should be storage in the warehouse on the following conditions

温度 Temperature: 10~ 40℃

湿度 Humidity: 30~70% relative humidity

不允许温、湿度有极剧变化。No rapid change on temperature and humidity

●禁止将产品保管在腐蚀性物质中，例如硫磺、氯气或者酸，否则将引起端头氧化，导致降低焊接性。Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solder ability.

●为了避免受潮气、灰尘等物质的影响，产品应保管于货架上。Products should be storage on the palette for the prevention of the influence from humidity, dust and so on.

●产品保管在库房中时，应避免热冲击，振动以及直接光照等等。Products should be storage in the warehouse without heat shock, vibration, and direct sunlight and so on.

●产品应密封包装 Products should be storage under the airtight packaged condition.